

Flexible connection of pipes to manhole systems

SealiT MANHOLE CONNECTION SEAL



Building construction



Civil engineering



Water



HVAC



Industry



TYPE SELECTION



SealiT Manhole Connection Seal

Fields of application

For the flexible connection of pipes to manhole systems and as connection pieces on pipework

Material

SBR-Rubber compliant with EN 681-1 WCL

Properties

High ozone and ageing resistance

Sizes

Pipe outside diameter ND 110, 160, 200



AVAILABLE ONLINE | WWW.PSI-PRODUCTS.COM



[Product data sheet](#)



[Installation](#)



PRODUCT INFORMATION

Properties

Manhole connection

Fields of application


Manhole connection for plastic pipes

Description

No special tools are required for quick and easy installation; the seal is simply inserted into the annular space.



TECHNICAL INFORMATION

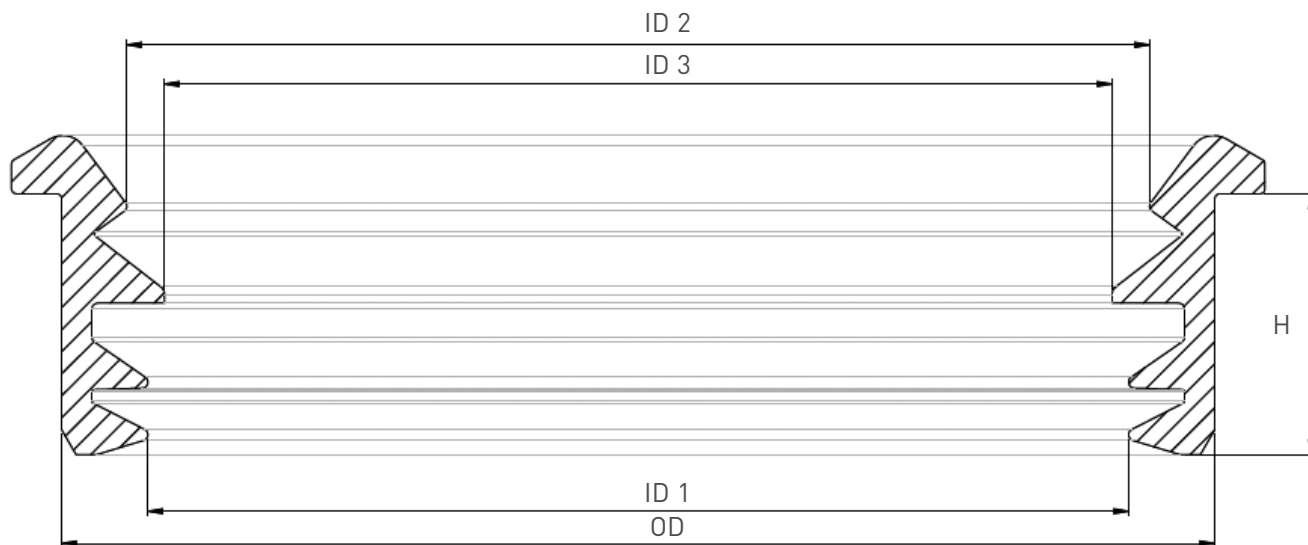

ND	Diameter of core drilling [mm]	OD [mm]	ID 1 [mm]	ID 2 [mm]	ID 3 [mm]	H [mm]
110	138,0 ± 2	142,0 ± 0,7	107,5 ± 0,7	116,0 ± 0,7	101,0 ± 0,7	52,0 ± 0,5
160	186,0 ± 2	189,0 ± 1,0	154,5 ± 0,7	163,0 ± 0,7	148,0 ± 0,7	52,0 ± 0,5
200	226,0 ± 2	230,0 ± 1,1	195,5 ± 1,0	204,0 ± 1,0	189,0 ± 1,0	52,0 ± 0,5

